


NTN NKX17T2Z Complex Bearing

Bearing No. NKX17T2Z

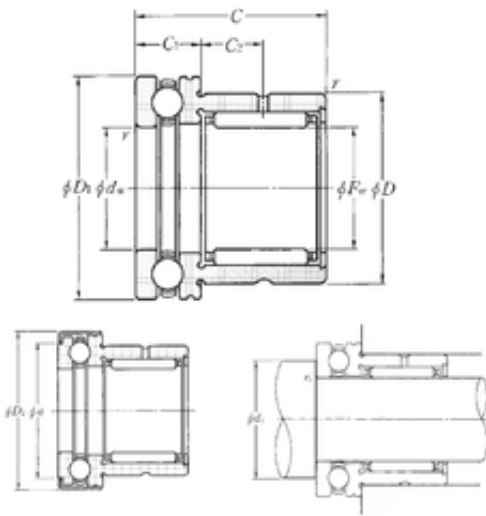

NKX17T2Z Bearing 2D drawings and 3D CAD models

Bore Diameter	17 mm
Outer Diameter	31 mm
d	17 mm
Fw	17 mm
D	26 mm
D1	30 mm
D2	31 mm
C	25 mm
a	25,7 mm
r min.	0,3 mm
C1	9 mm
da min.	25 mm
ra max.	0,3 mm
C2	8 mm
Weight	0,056 Kg
Dynamic load rating radial (C)	10,4 kN
Dynamic load rating axial (C)	10,8 kN
Static load rating radial (C0)	14,4 kN
Static load rating axial (C0)	18,2 kN
(Grease) Lubrication Speed	6000 r/min
dw	17 mm
rs min	0.3 mm
Dw	2 mm
Dw1	4.76 mm
Lw	11.8 mm



Complex bearing Manufacturer

Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Precision class	P0
Mass	0.06 kg
Cr	10.4 kN
Ca	10.8 kN
C0r	14.4 kN
C0a	18.2 kN
Nlim (grease)	6,000 rpm
Nlim (oil)	8,500 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
da min	25 mm
ras max	0.3 mm
Category	Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.056
Product Group	B04144